



94 Jackson Road, Devens, MA 01434-4012 USA


ADAPTORS

Model RMAD.BS.1023SMAm
Between Series – 1.0/2.3 male to SMA male

Frequency (GHz)	Impedance (Ω)	VSWR (max)	Insertion Loss (dB min)
DC – 8	50	1.30:1	0.8

Notes:

- Material:
Body: brass/gold
Contact: BeCu/gold
Insulator: PTFE
- Operation temperature: -40C to +85C deg
- Interface: per DIN-47297, DIN-41626-2

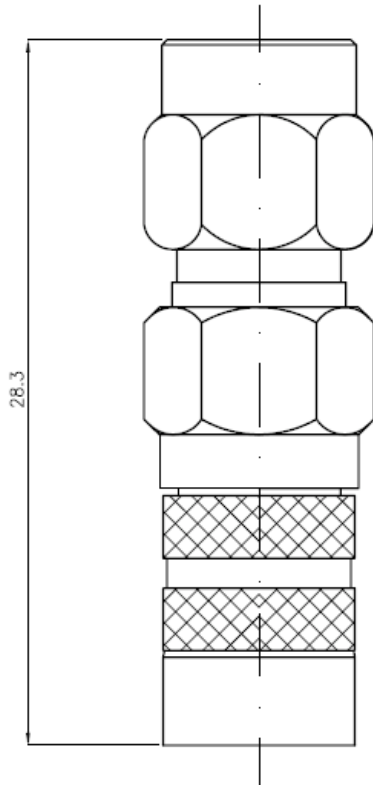

All specifications are subject to change without notice.