



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS


Model RMAD.BS.N18SMA27ffBH

Between Series – N18 female to SMA27 female bulkhead

Frequency (GHz)	Impedance (Ω)	VSWR (max)	Insertion Loss (dB min)
DC – 18	50	1.15:1	0.5

Notes:

- a. Material:
 - 1 = Body: SUS303/passivate
 - 2 = Contacts: BeCu/gold
 - 3 = Dielectric: PTFE
 - 4 = Nut: SUS303/passivate
 - 5 = Washer: SUS303/passivate
- b. Operation temperature: -55C to +85C deg
- c. Interface: per MIL-C-83517

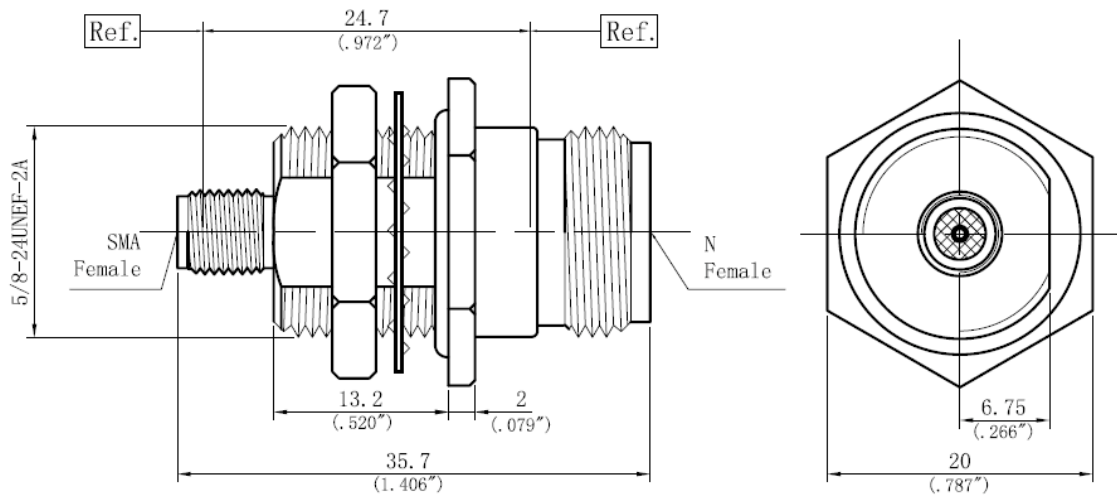

Dimensions in mm. All specifications are subject to change without notice.

Tel: 978-772-3767

www.responsemicrowave.com

Fax: 978-772-3768