



94 Jackson Road, Devens, MA 01434-4012 USA

## ADAPTORS


**Model RMAD.BS.NSff4HF**

**Between Series - N female to SMA female 4-hole flange**

Frequency (GHz)	Impedance ( $\Omega$ )	VSWR (max)	Insertion Loss (dB min)
DC – 10	50	1.20:1	0.5

### Notes:

- Material:**  
Body: brass/nickel  
Contacts: BeCu/gold  
Dielectric: PTFE  
Gasket: silicon
- Operation temperature:** -55C to +85C deg
- Interface:** per MIL-C-83517

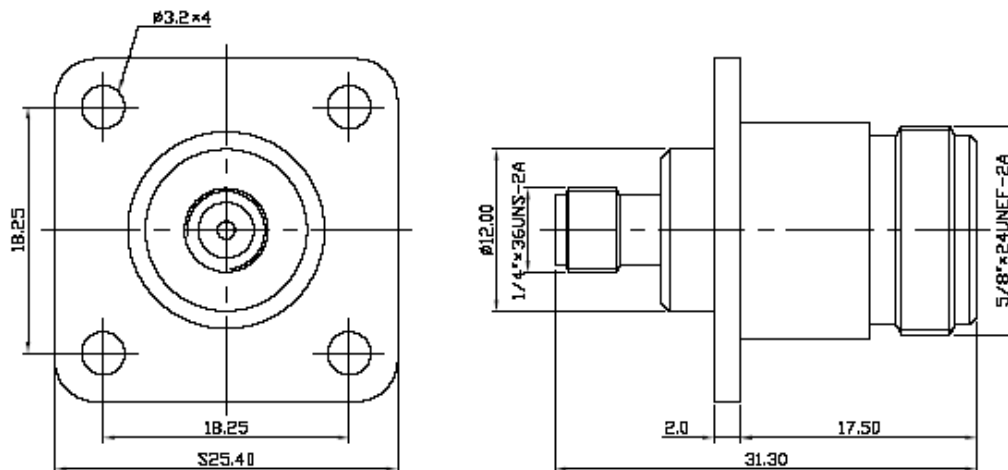

*All specifications are subject to change without notice.*