



94 Jackson Road, Devens, MA . 01434-4012

ADAPTORS


Model RMAD.BS.NTNCmfRA

Between Series N male to TNC female 90° angle

Frequency (GHz)	Impedance (Ω)	VSWR (max)	Insertion Loss (dB min)
DC – 11	50	1.20:1	0.7

Notes:

- Material:
 - Body: brass/nickel
 - Contacts: BeCu/gold
 - Dielectric: PTFE
 - Gasket: silicon
- Operation temperature: -55C to +85C deg
- Interface: per MIL-C-83517 & IEC169-15

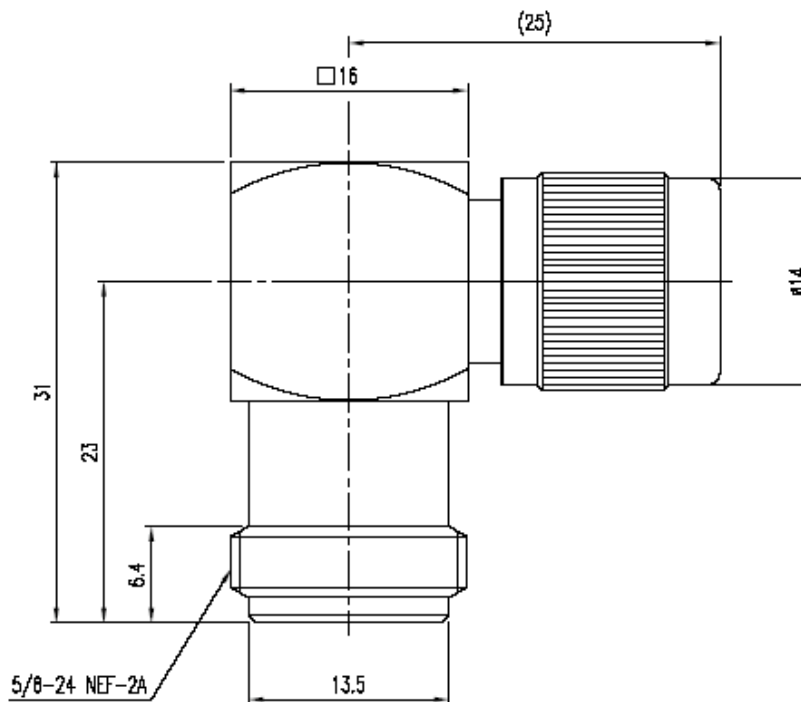

All specifications are subject to change without notice.