



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS


Model RMAD.BS.SMAnff

Between Series - N to SMA

Frequency (GHz)	Impedance (Ω)	VSWR (max)	Insertion Loss (dB min)
DC – 10	50	1.20:1	0.5

Notes:

- Material:
 - Body: brass/nickel
 - Contacts: BeCu/gold
 - Dielectric: PTFE
 - Gasket: silicon
- Operation temperature: -55C to +85C deg
- Interface: per MIL-C-83517

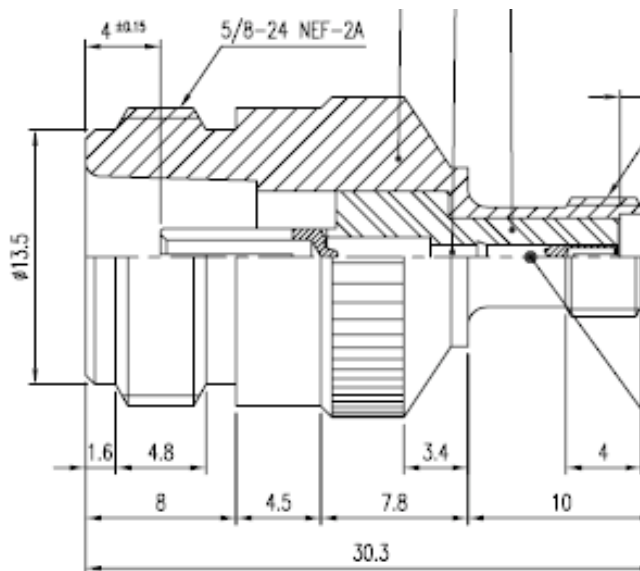

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com