



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

## ADAPTORS


Model RMAD.IS.N18mm

In Series – N male to N male

Frequency (GHz)	Impedance ( $\Omega$ )	VSWR (max)	Insertion Loss (dB f=frequency GHz)
DC – 18	50	1.20:1	$0.07 f^{1/2}$

### Notes:

- a. Material:
  - Body: SUS303/passivate
  - Socket Contacts: BeCu/gold
  - Dielectric: PEI
- b. Operation temperature: -65C to +105C deg

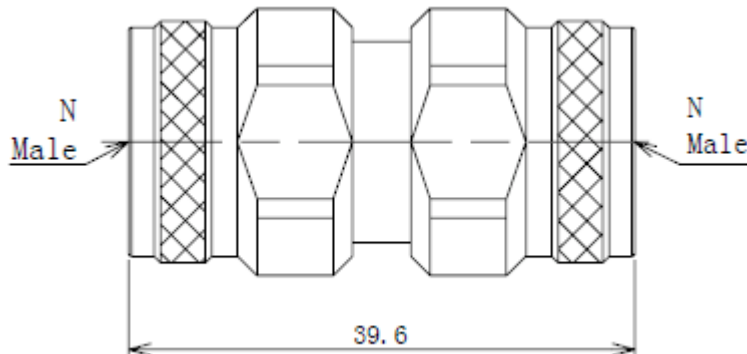

*Dimensions in mm. All specifications subject to change*

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)