



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

Model RMAD.IS.Nmm


In Series – N male/male

Electrical Specifications:

Frequency (GHz)	Impedance (Ω)	VSWR (max)	Insertion Loss (dB f=frequency GHz)
DC – 8	50	$1.05 + 0.005 f$ (GHz)	$0.07 f^{1/2}$

Notes:

- Material:
Body: brass/nickel
Socket Contacts: BeCu/gold
- Operation temperature: -65C to +105C deg
- Interface: N per MIL-C-39012 & IEC169-15

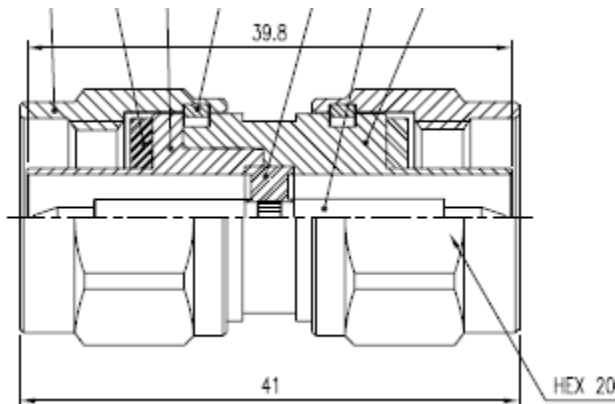

Dimensions in mm. All specifications subject to change.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com