



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434


ADAPTORS

Model RMAD.IS.SMA27mm4HF In Series – SMA m/m 4HF

Frequency (GHz)	Impedance (Ω)	VSWR (max)	Insertion Loss (dB f=frequency GHz)
DC – 27	50	1.15:1	0.035 f $\frac{1}{2}$

Notes:

- Material:
Body: SUS303/passivated
Socket Contacts: BeCu/gold
- Operation temperature: -60C to +165C deg
- Interface: SMA per MIL-STD-348A
- Durability: 500 mating cycles

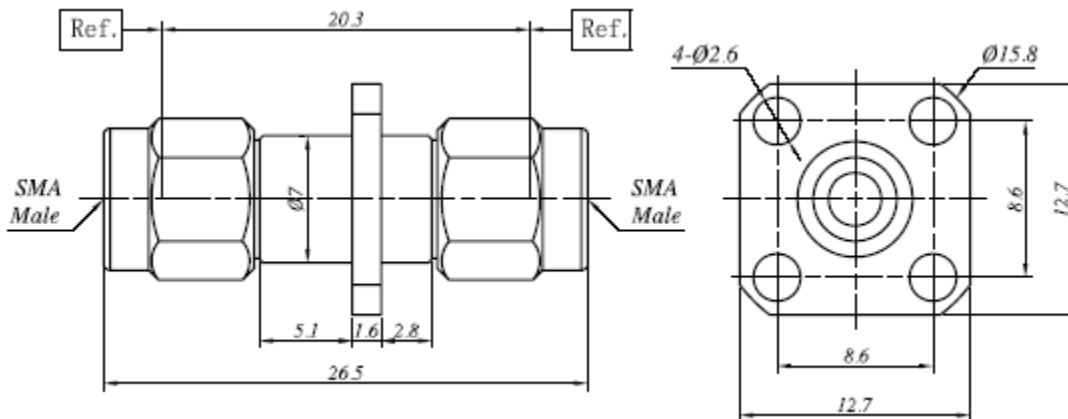

All specifications subject to change

Telephone: 978-772-3767
772-3768

Fax: 978-

www.responsemicrowave.com