



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.SMAmm

In Series – SMA male/male

Frequency (GHz)	Impedance (Ω)	VSWR (max)	Insertion Loss (dB f=frequency GHz)
DC – 18	50	1.12:1	0.035 f $\frac{1}{2}$

Notes:

- a. Material:
 Body: stainless steel/passivate
 Socket Contacts: BeCu/gold
- b. Operation temperature: -60C to +165C deg
- c. Interface: SMA per MIL-STD-348A

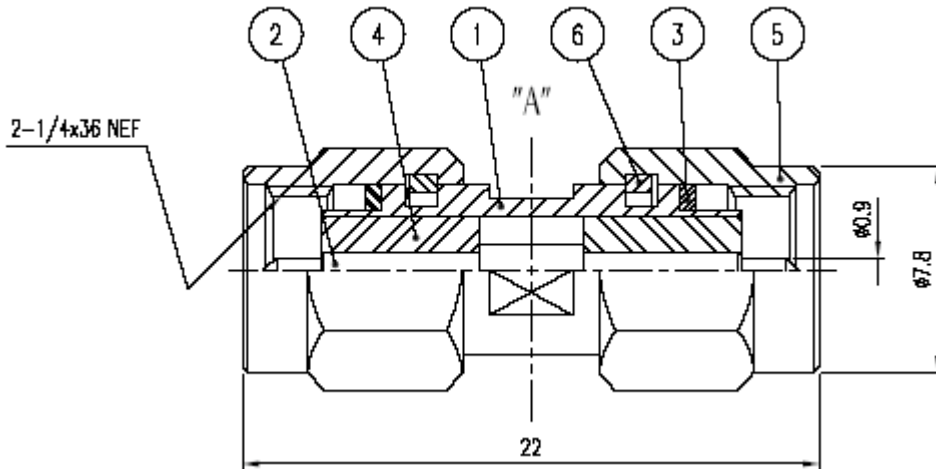

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com