



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator

Model RMA20.18000SMAmf


Fixed Attenuator

ELECTRICAL SPECIFICATION

FREQUENCY (MHz)	ATTENUATION (dB max)	POWER (Watt) (avg/pk)	IMPEDANCE (Ω)	VSWR (max)
DC – 18000	20 +/- 0.5	2 / 5	50	1.25 : 1

Notes:

- Weight: 5grams
- Connector: SMA male/female
- Operation temperature: -55C to +125C deg
- Case material: Stainless Steel/ passivate or Brass with gold plating
- Insert desired attenuation value at "xx" in P/N
- RoHS Compliant Hardware*

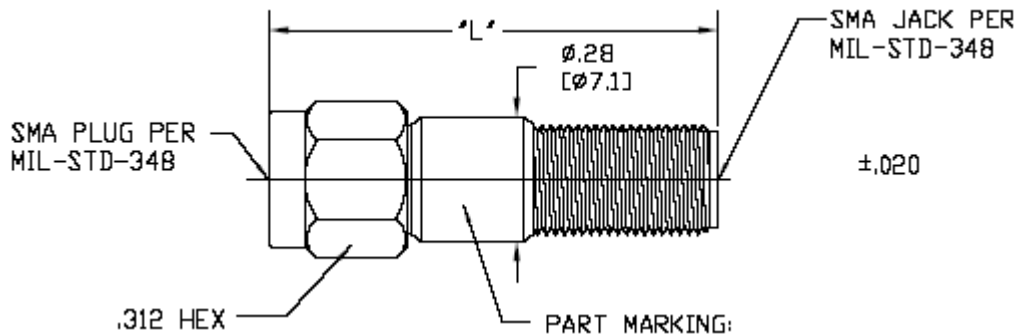

Attenuation Value	Length
1 to 6 dB	0.86 +/- 0.03"
7 to 19 dB	0.86 +/- 0.03"
20 to 30dB	1.02 +/- 0.03"

All specifications are subject to change without notice.

Dimensions: inches

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 8/17/12