



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMA3.3000BNCmf75R

Fixed Attenuator – BNC

| FREQUENCY (MHz) | ATTENUATION (dB max) | POWER (Watt) (avg/pk) | IMPEDANCE (Ω) | VSWR (max) | INSERTION LOSS (dB max) |
|-----------------|----------------------|-----------------------|------------------------|------------|-------------------------|
| DC – 3000 | 3 +/- 0.75 | 1 / 2 | 75 | 1.50 : 1 | 0.6 |

Notes:

- Connector: BNC male input / BNC female output
- Impedance: 75 ohms
- Operation temperature: -55C to +100C deg
- Case material: brass – nickel plate

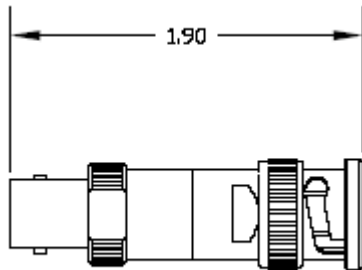

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978.772.3768

www.responsemicrowave.com

Rev 08/06/12