



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMA3.4000SMAmf

Fixed Attenuator

FREQUENCY (MHz)	ATTENUATION (dB max)	POWER (Watt) (avg/peak)	IMPEDANCE (Ω)	VSWR (max)
DC – 4000	3+/-0.3	2 / 5	50	1.20 : 1

Notes:

- Operating Power: 2 Watts
- Connector: SMA male/female
- Operation temperature: -55C to +125C deg
- Case material: Brass with gold plating

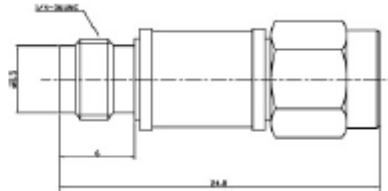

All specifications are subject to change without notice.

Dimensions: mm

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 8/06/12