



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator



Model RMAT30.2500Nmf

Fixed Attenuator Type N

FREQUENCY (MHz)	ATTENUATION (dB max)	POWER (Watt) (avg/pk)	IMPEDANCE (Ω)	VSWR (max)
DC – 2500	30+/-1.0	100 / 1000 100W CW, 1KW peak	50	1.15 : 1

Notes:

- a. Connector: N male/female
- b. Operation temperature: -55C to +125C deg
- c. Case material: aluminum

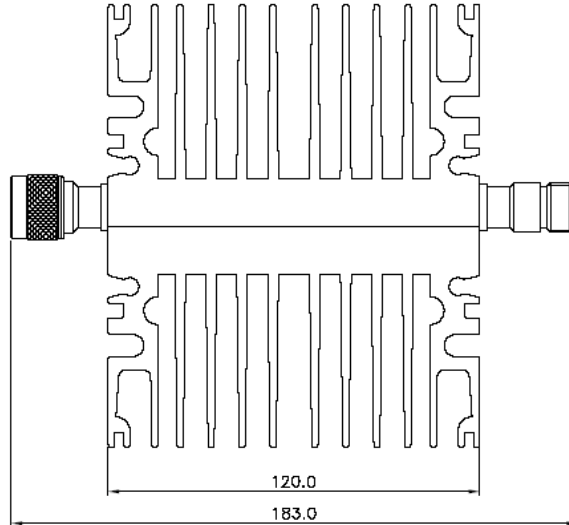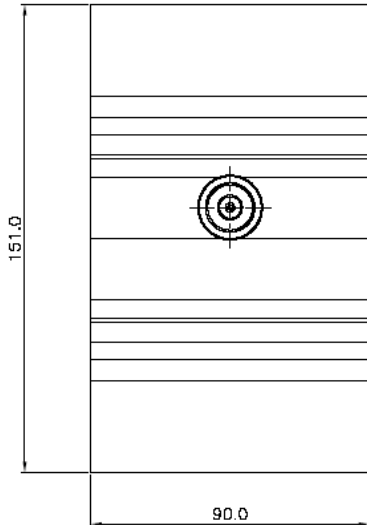

All specifications are subject to change without notice.

Dimensions: mm

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 8/06/12