



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

## Coaxial Attenuator


Model RMA6.18000SMAmf

Fixed Attenuator

FREQUENCY (MHz)	ATTENUATION (dB max)	POWER (Watt) (avg/pk)	IMPEDANCE ( $\Omega$ )	VSWR (max)
DC – 18000	6 +/- 0.3	2 / 5	50	1.25 : 1

### Notes:

- Weight: 5grams
- Connector: SMA male/female
- Operation temperature: -55C to +125C deg
- Case material: Stainless Steel/ passivate or Brass with gold plating
- Insert desired attenuation value at "xx" in P/N
- RoHS Compliant Hardware

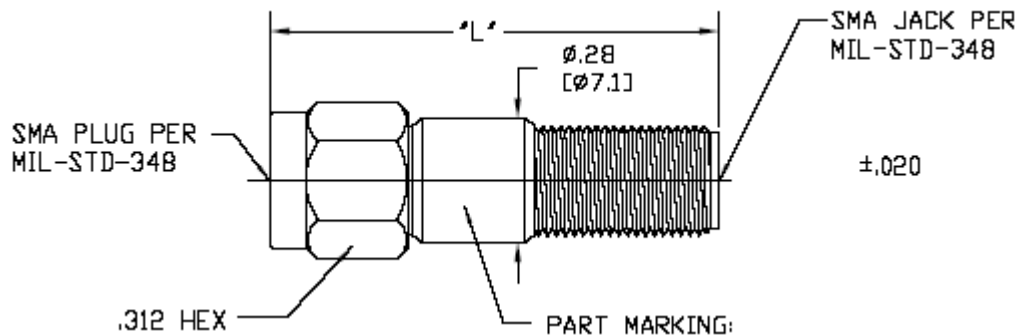

Attenuation Value	Length
1 to 6 dB	0.86 +/- 0.03"
7 to 19 dB	0.86 +/- 0.03"
20 to 30dB	1.02 +/- 0.03"

All specifications are subject to change without notice.

Dimensions: inches

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)

Rev 8/17/12