



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator



Model RMAT60.3000Nmf100

Fixed Attenuator Type N

FREQUENCY (MHz)	ATTENUATION (dB max)	POWER (Watt) (avg/pk)	IMPEDANCE (Ω)	VSWR (max)
DC – 3000	60+/-2.0	10 / 100 100W CW	50	1.30 : 1

Notes:

- a. Connector: N male/female
- b. Operation temperature: -40C to +85C deg
- c. Materials:
 Housing: Aluminum/black anodized
 Connector Body: Brass/ternary alloy plate
 Connector Contact: Brass/gold

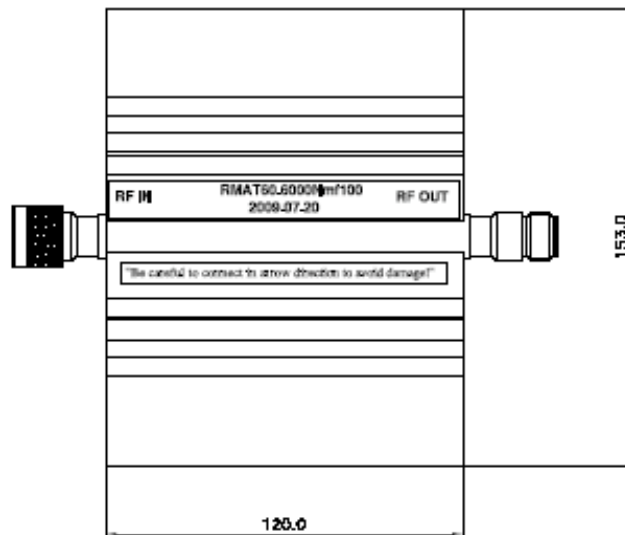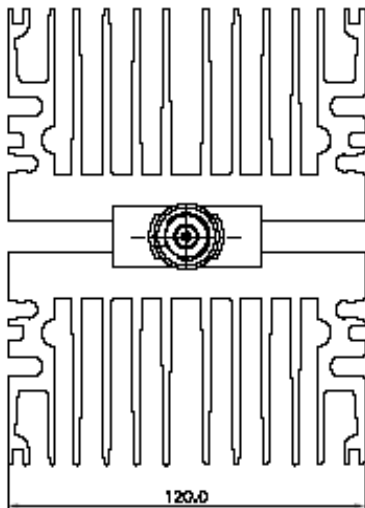

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com