



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators


Model RMIS.2000-7000Sf

15dB Isolator SMA female

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB min)	VSWR (max)
2000 - 7000	1.5	15	1.50 : 1

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female
- Power: 10w
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
- Operation temperature: -20C to +85C deg

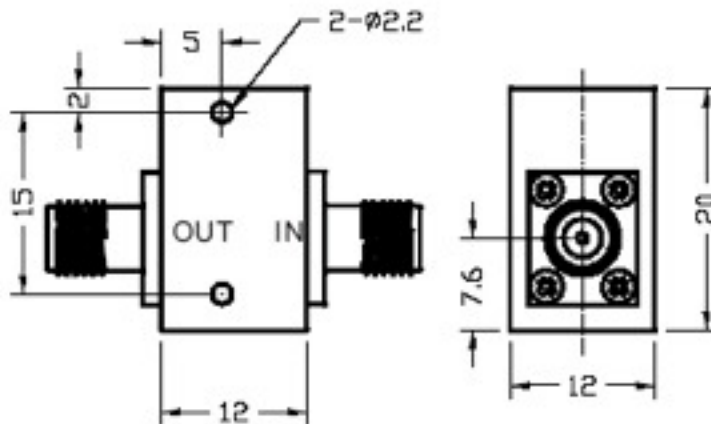

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com