



94 Jackson Road, Suite 110 Devens , MA 01434-4012 USA

## Isolator

## SMA Female Connectors

Model RMIS.2020-2040Sf

Frequency (MHz)	Forward Insertion Loss (dB max)	Reverse Isolation (dB min)	VSWR (max)	Power (Watt)	
				Forward	Reverse
2020 - 2040	0.3	25	1.20 : 1	60	10


### Mechanical Specifications:

(See Outline Drawing 10153 for details)

Body Length (inches)	Body Width (inches)	Body Height (inches)
0.787	1.177	0.591

### Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female (2) places
- Operation temperature: -30 °C to +70°C deg

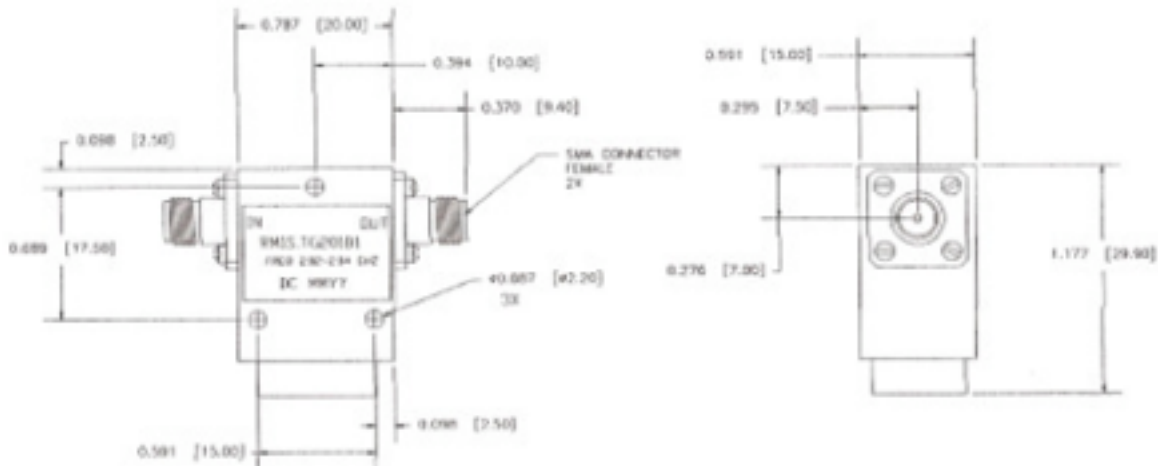

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)