



94 JACKSON ROAD, SUITE 110 DEVENS, MA 01451

Isolators / Circulators


Model RMIS.9000-9500Sf

Isolator SMA female

Frequency (MHz)	Forward Insertion Loss (dB max)	Reverse Isolation (dB min)	VSWR (max)	Reverse Power (Watt)
9000 - 9500	0.3	30	1.20 : 1	10

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female
- Case material: Aluminum alloy
- Operation temperature: -40C to +85C deg

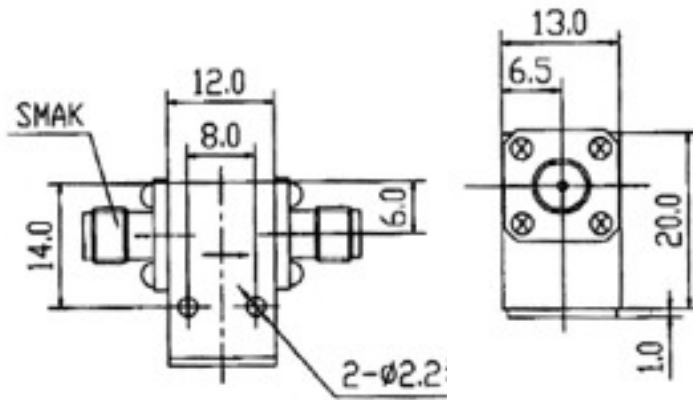

All specifications are subject to change without notice.

Telephone: 978.456.9186 or 978.772.3767

Fax: 978.772.3768

www.responsemicrowave.com