



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler


Model RMCO10.150Sf

10dB Directional Coupler SMA female

Frequency (MHz)	Coupling (dB)		Insertion Loss (dB max)			Directivity (dB min)			VSWR	
	Norm.	Flat.	L	M	U	L	M	U	Typ	Max
30 – 150	10 ± 0.5	± 0.5	1.6	1.5	1.6	25	19	18	1.2	1.35

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female
- Power: ≤ 25 W forward, 1W reverse
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
- Operation temperature: -40C to +70C deg

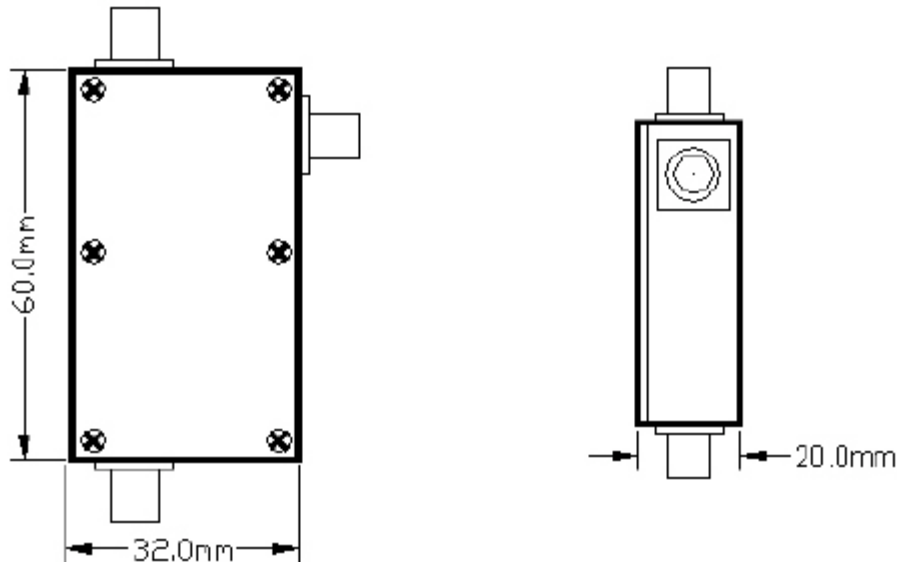

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com