



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.8-16Sf

10dB Directional Coupler SMA female


Electrical Specifications:

Frequency (MHz)	Coupling (dB)		Insertion Loss (dB max)	Directivity (dB min)	VSWR (max)	Sensitivity (dB)
	Norm.	Flat.				
8000 – 16000	10 ± 0.5	± 0.5	0.7	12	1.50 : 1	<=/-0.4

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 3 places, termination 1 place
- Power: Forward/Reverse ≤ 50 W, Peak 3Kw
- Case material: Aluminum alloy with black paint
- Operation temperature: -40C to +70C deg

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

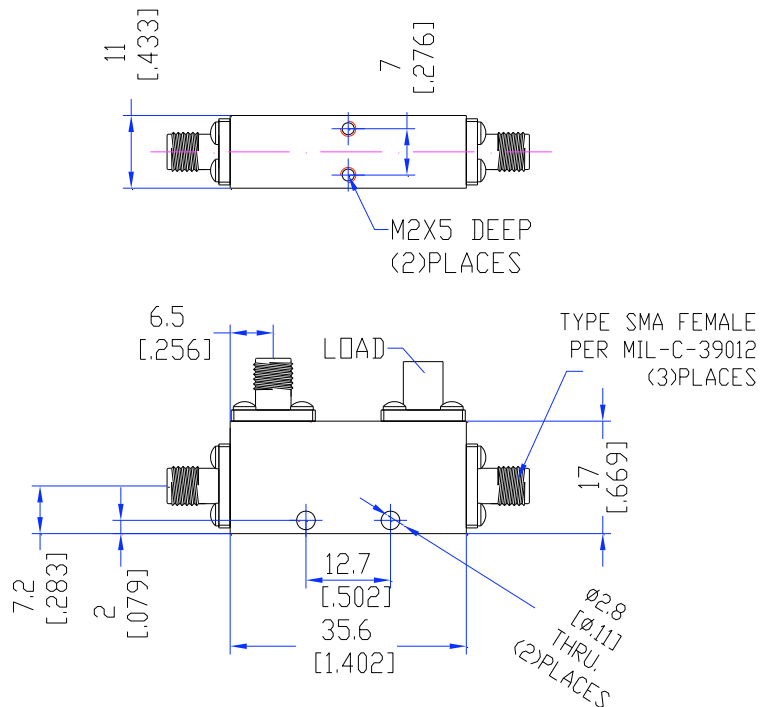

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com