



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO20.3600Sf


20dB Directional Coupler SMA female

Electrical Specifications:

Frequency (MHz)	Coupling (dB)		Insertion Loss (dB max)	Directivity (dB min)	VSWR (max)	Isolation (dB min)
	Norm.	Flat.				
3400 – 3600	20 ± 0.5	± 0.5	0.5	15	1.35 : 1	18

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female
- Power: ≤ 10 W
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
- Operation temperature: -35C to +80C deg

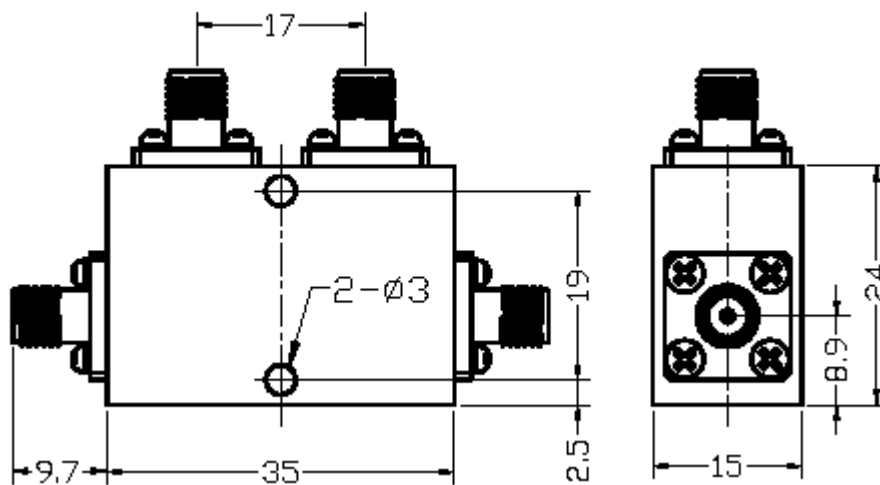

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978772-3768

www.responsemicrowave.com



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Telephone: 978-772-3767

Fax: 978772-3768

www.responsemicrowave.com