



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler


Model RMCO30.1-6.Sf

30dB Directional Coupler SMA female

Frequency (MHz)	Coupling (dB)		Insertion Loss (dB max)	Directivity (dB min)	VSWR (max)
	Norm.	Flat.			
1000 – 6000	30 ± 1.0	± 1.0	0.5	18	1.25 : 1

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 3 places, removable termination 1 place
- Power: Forward/Reverse ≤ 50 W
- Case material: Aluminum alloy with gray paint
- Operation temperature: -40C to +70C deg
- RoHS Compliant to Council Directive 2002/95/EC

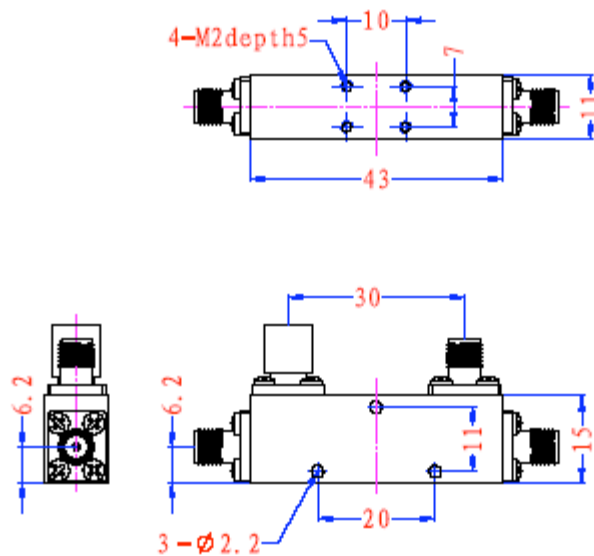

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com