



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler


Model RMCO30.1000.Sf

30dB Directional Coupler SMA female

Frequency (MHz)	Coupling (dB)		Insertion Loss (dB max)	Directivity (dB min)	VSWR (max)
	Norm.	Flat.			
500 – 1000	30 ± 1.5	± 1.5	0.4	15	1.20 : 1

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 3 places, removable termination 1 place
- Power: Forward/Reverse \leq 100 W
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved
- Operation temperature: -35C to +80C deg
- Mounting holes – Through, 2 places 0.150"OD, 2.4" CL/CL spacing, 0.600" in from ends

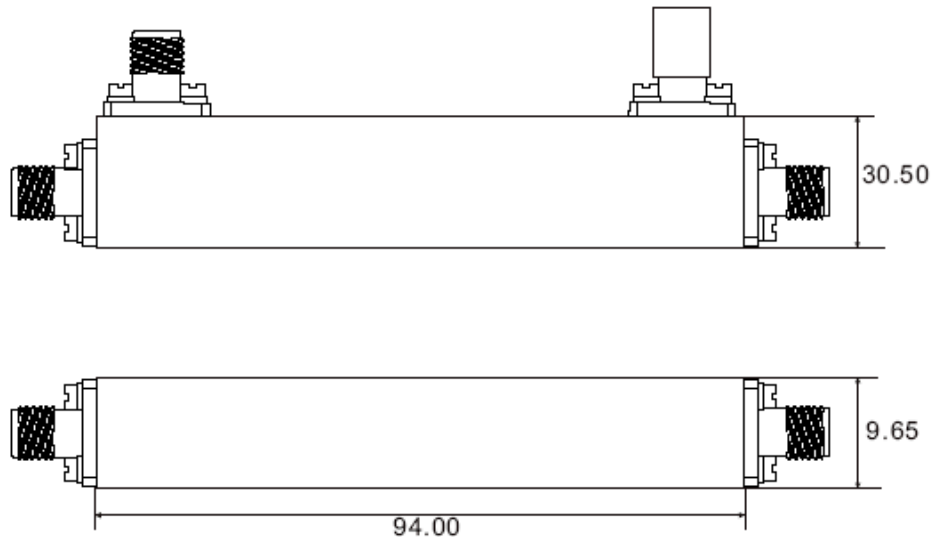

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com