



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Directional Coupler


Model RMCO30.2500Nf

30dB, N female\*

Frequency Range (MHz)	Coupling (dB)		Insertion Loss (dB max)	Directivity (dB min)	VSWR (max)
	Norm.	Flat.			
800 – 2500	30 ± 1.0	± 1.0	0.3	20	1.25 : 1

### Notes:

- Input and output impedance: 50 Ohms
- Connector: N female nickel plate
- Power: 200 W avg/min, 1KW peak
- Case material: Aluminum alloy
- Operation temperature: -35°C to +80°C
- RoHS Compliant part

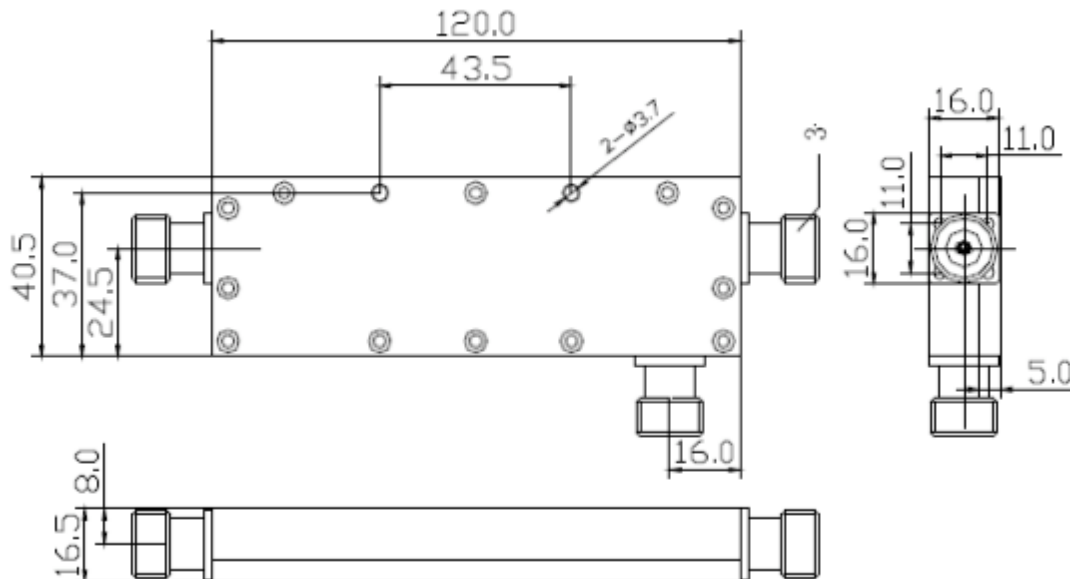

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)