



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Directional Coupler


Model RMCO30.2500Sf

30dB Coupler - SMA female

Frequency (MHz)	Coupling (dB)		Insertion Loss (dB max)	Directivity (dB min)	VSWR (max)
	Norm.	Flat.			
800 – 25000	30 ± 1.0	± 1.0	0.5	20	1.30 : 1

### Notes:

- Input and output impedance: 50 Ohms
- Power Handling  $\leq$  50 Watts CW
- Connector: SMA female
- Material: aluminum w/clear iridite
- Operation temperature: -35 °C to +85°C deg

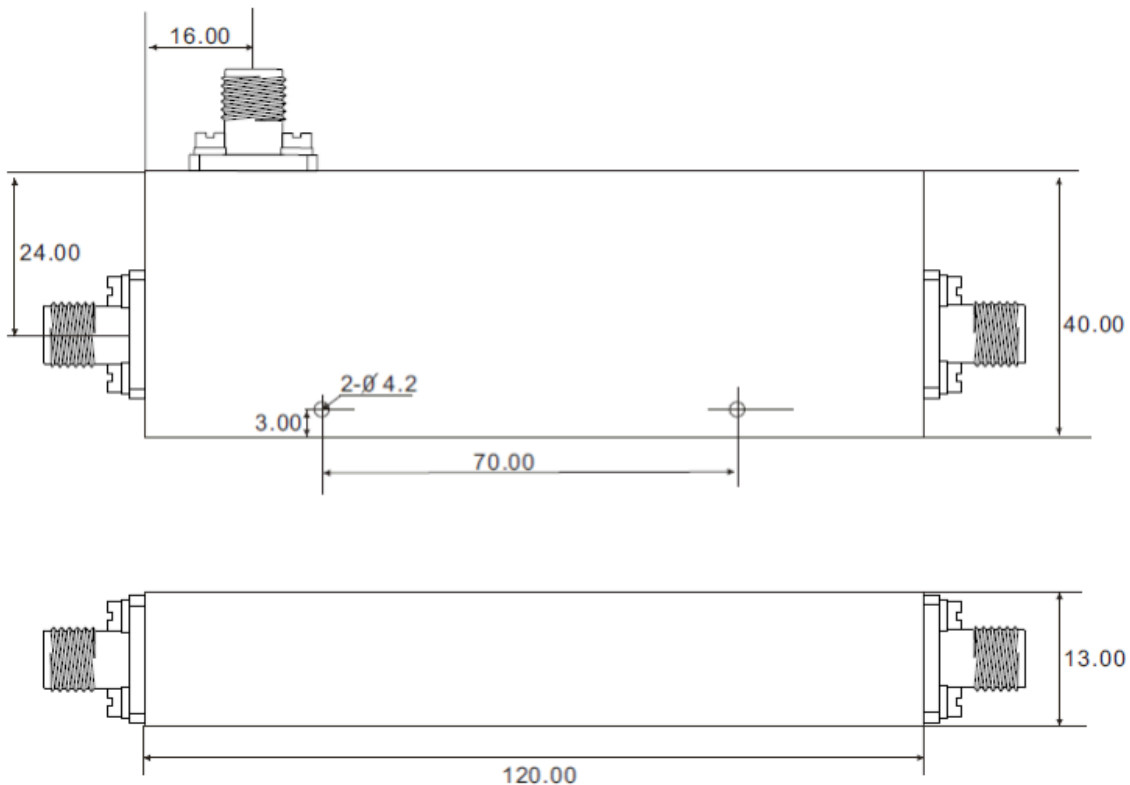

Dimensions in mm. All specifications are subject to change without notice. **RoHS Compliant**

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)