



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler


Model RMCO6.490Nf

6dB Directional Coupler N female

Frequency (MHz)	Coupling (dB)		Insertion Loss (dB max)	Directivity (dB min)	VSWR (max)
	Norm.	Flat.			
450 –490	6 ± 0.1	± 0.1	0.4	18	1.25 : 1

Notes:

- Input and output impedance: 50 Ohms
- Connector: N female
- Power: ≤ 50 W
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
- Operation temperature: -40°C to $+70^{\circ}\text{C}$ deg

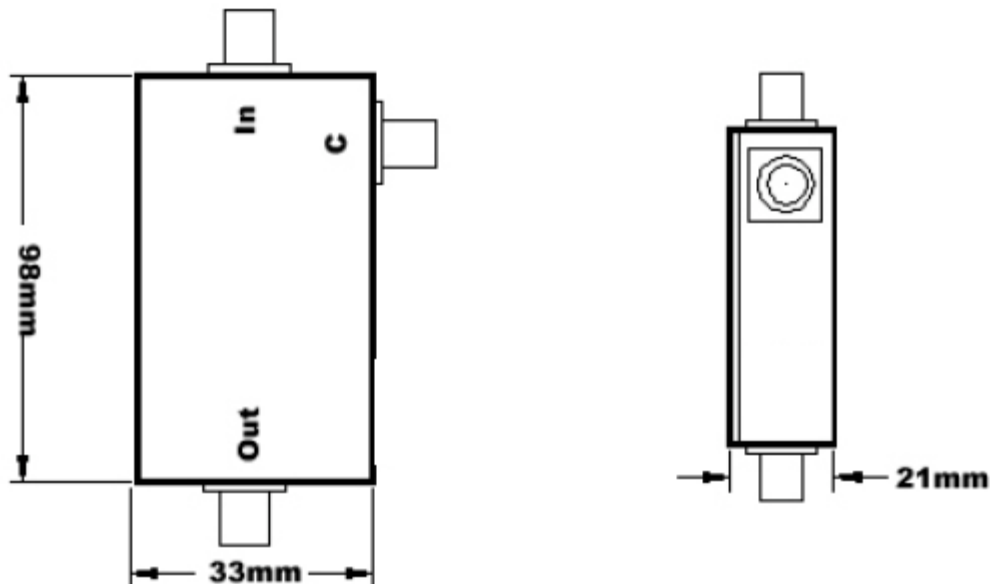

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com