



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Filters/Diplexers

Model RMDU.1850-1995Nf

DUPLEXER, N Female

SPECIFICATIONS

ITEM		SPECIFICATION	
Pass Band		Up Link	Down Link
		1850~1915MHz	1930~1995MHz
Pass Band Insertion Loss		1.2dB Max.	
Pass Band Ripple		0.8dB Max.	
Pass Band Return Loss		18dB Min.	
Rejection	DC~1830MHz	50dB Min.	
	1995~3980MHz		
	Dc~1915MHz		75dB Min.
	2010~3980MHz		50dB Min.
Isolation (Up Link / Down Link)		75dB Min.	
Power Handling		50W CW	
Operating Temperature		-20□ to +70□	
Operating Humidity		0 to 95%	
Connector		N(F)	
Size		201 x 162 x 35Max. (mm)	
Finish		Black Epoxy	



Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

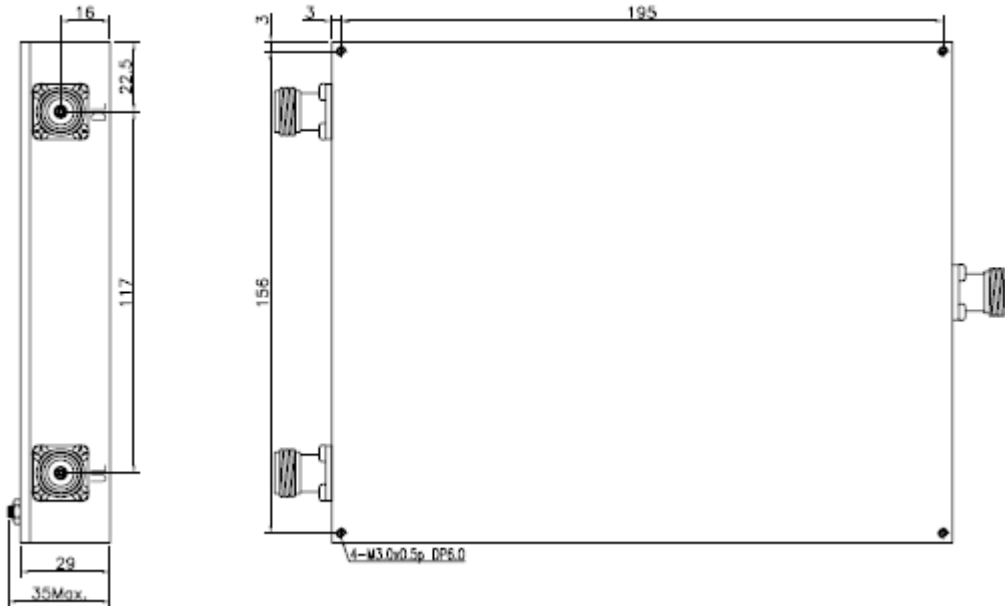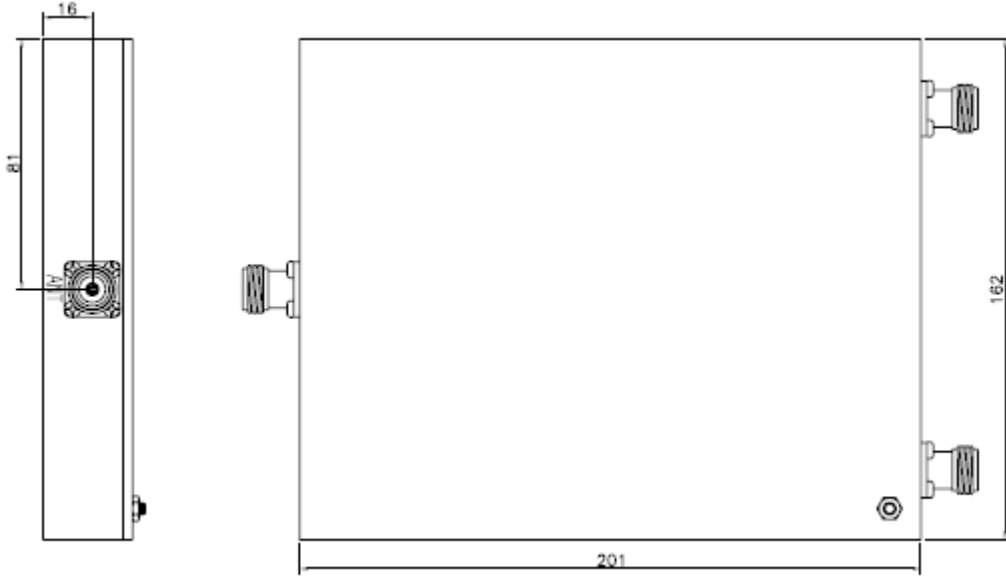

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com