



94 JACKSON RD, STE 100, DEVENS, MA 01434

Power Dividers


Model RMPD12.800-2500Sf

12 way Power Divider SMA female

Frequency (MHz)	Insertion Loss (dB typ/max)	Isolation (dB min)	VSWR (typ)	Phase Balance ($^{\circ}$ max)	Amplitude Balance (dB max)
800 - 2500	0.8/1.5	20	1.3:1	15	1.6

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female
- Forward Power: $\leq 50W$, Reverse: $\leq 1W$
- Case material: Aluminum alloy
- Operation temperature: $-35C$ to $+85C$ deg

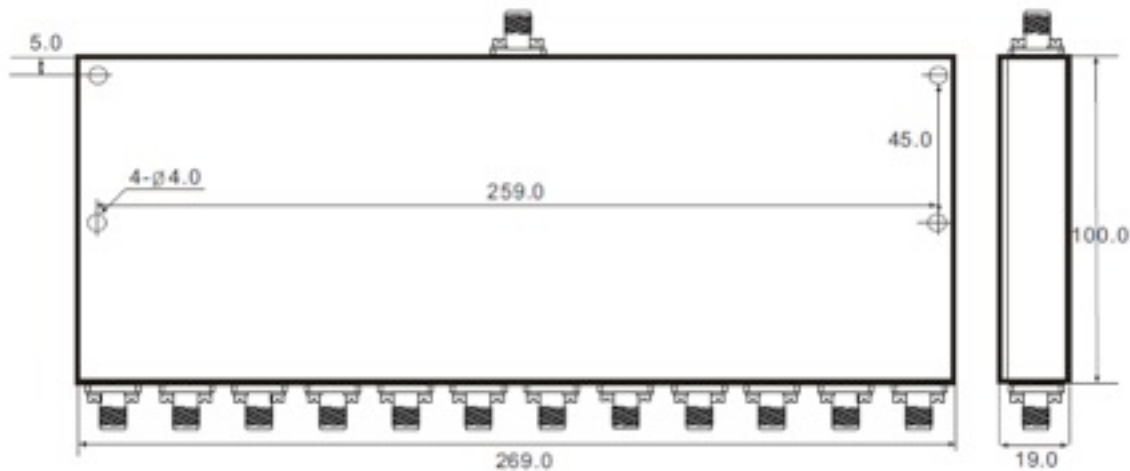

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com