



94 JACKSON RD, STE 100, DEVENS, MA 01434

Power Dividers


Model RMPD16.02-30Sf

16 way Power Divider SMA female

Frequency (MHz)	Insertion Loss (dB typ/max)	Isolation (dB min)	VSWR (max)	Phase Balance ($^{\circ}$ max)	Amplitude Balance (dB max)
2 - 30	0.8/1.7	20	1.5:1	15	1.0

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female
- Forward Power: ≤ 25 W
- Case material: Aluminum alloy
- Operation temperature: -35C to +85C deg

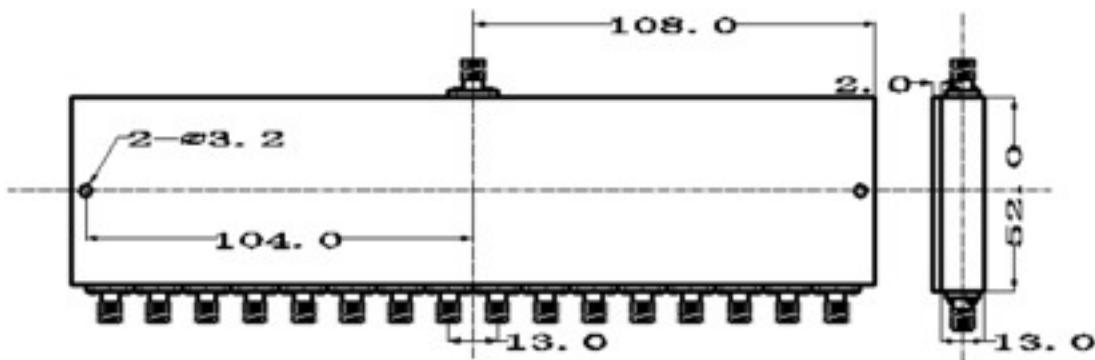

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com