



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD16.700-3000Sf


16-Way, SMA female

Frequency (MHz)	Insertion Loss (dB typ/max)	Isolation (dB typ/min)	VSWR (max)	Phase Balance (° max)	Amplitude Balance (dB max)
700 - 3000	0.8/1.6	23/18	1.5:1	6	0.8

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 17 places
- Power: 50 W forward, 1W reverse
- Case material: Aluminum alloy w/iridite finish
- Operation temperature: -35C to +85C deg

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applied: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

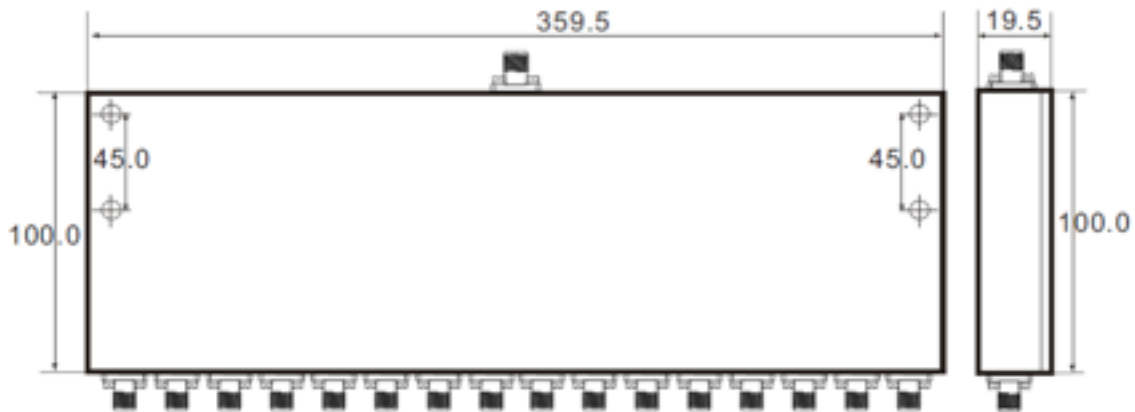

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com