



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Power Divider/Splitters


**Model RMPD2.01-2Sf**

**2-way Power Divider SMA female**

Frequency (MHz)	Insertion Loss (dB) typ/max	Isolation (dB) typ/min	VSWR (max)	Phase Balance (°) max	Amplitude Balance (dB) max
0.01 - 2000	0.7/1.1	18/12	1.45:1	4	0.5

### Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female (3 places)
- Power: input:  $\leq 15$  W
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved
- Operation temperature: -35C to +80C deg

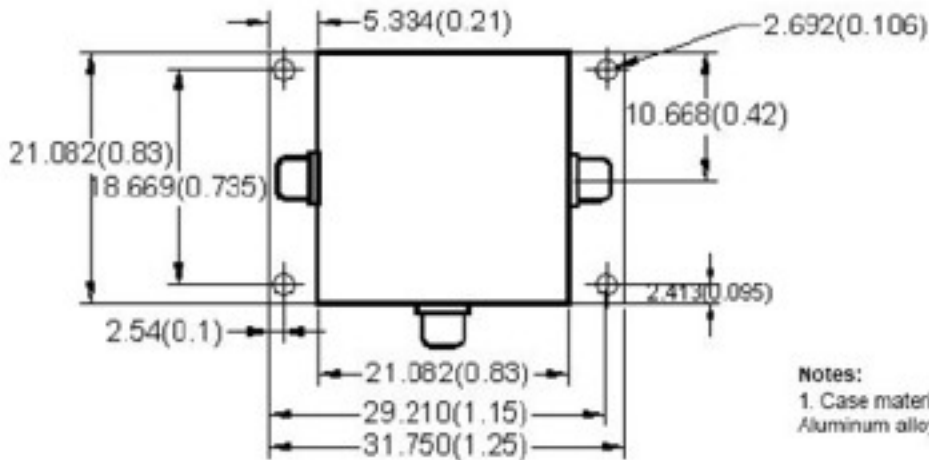

Notes:  
1. Case material:  
Aluminum alloy with Nickel-plating.

*All specifications are subject to change without notice.*

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)