



94 JACKSON ROAD, STE 110, DEVENS, MA 01434

Power Divider/Splitters


Model RMPD2.10-2150Sf

2-way Power Divider SMA female

Frequency (MHz)	Insertion Loss (dB) typ/max	Isolation (dB) typ	VSWR (max)	Phase Balance (°) max	Amplitude Balance (dB) max
10 - 2150	1.2/2.0	20	1.45:1	2	0.2

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female (3 places)
- Power: input: ≤ 50 W, Reverse: ≤ 1 W
- Case material: Aluminum alloy with Nickel-plating
- Operation temperature: -35C to +80C deg

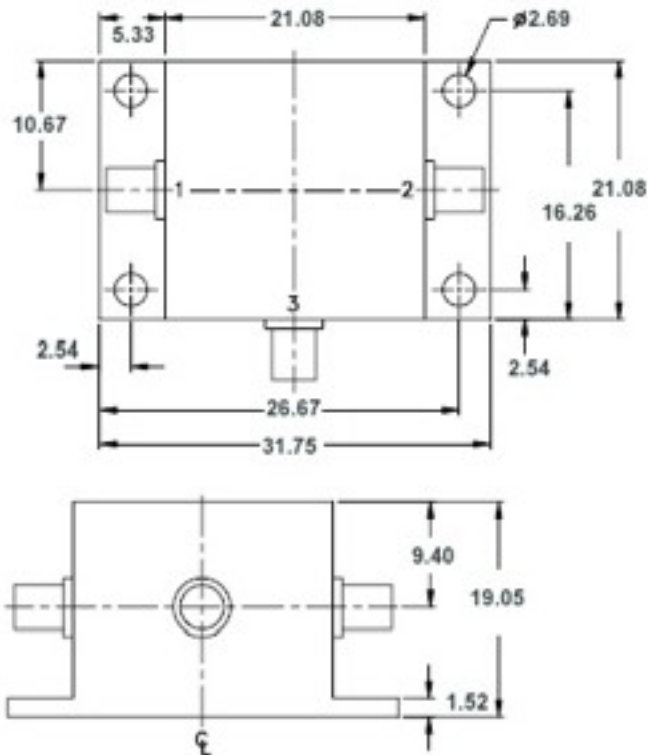

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com