



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Divider / Splitters


Model RMPD2.1000Sf

2 way Power Divider SMA female

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB min)	VSWR (typ)	Phase Balance (°) max	Amplitude Balance (dB) max
8000 - 10000	0.4	20	1.25:1	3	0.3

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female
- Power: 25w forward, ≤ 1 W reverse
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
- Operation temperature: -35C to +85C deg

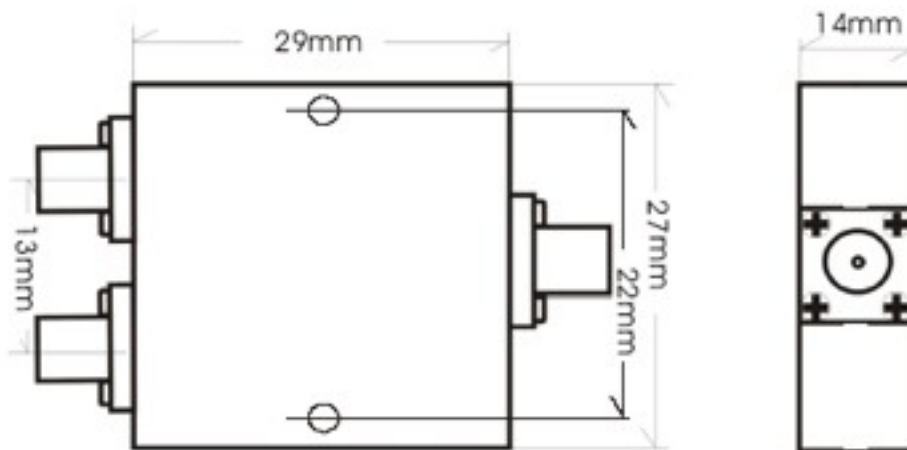

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com