



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Power Divider/Splitters


Model RMPD2.2000-2200Sf  
female

2-way Power Divider SMA

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB min)	VSWR (max)	Phase Balance (°)	Amplitude Balance (dB)
2000 - 2200	0.3	25	1.4:1	2	0.3

### Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female (3 places)
- Power: input:  $\leq 15$  W
- Case material: Aluminum alloy with Nickel and iridite plating
- Operation temperature: -35C to +80C deg

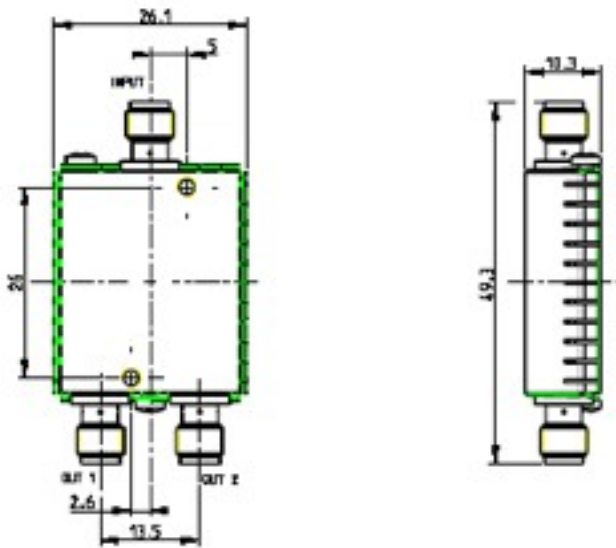

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)