



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Power Divider/Splitters


Model RMPD2.5.9-8.5Nf

2-way Power Divider N female

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB min)	VSWR (max)	Phase Balance (°) max	Amplitude Balance (dB) max	Return Loss (dB max)
5900 - 8500	0.8	16	1.50:1	5	0.5	16

### Notes:

- Input and output impedance: 50 Ohms
- Connector: Type N female (3 places)
- Forward Power:  $\leq 15$  W
- Case material: Aluminum alloy with Nickel-plating
- Operation temperature: -35C to +80C deg
- Waterproof version to IP64

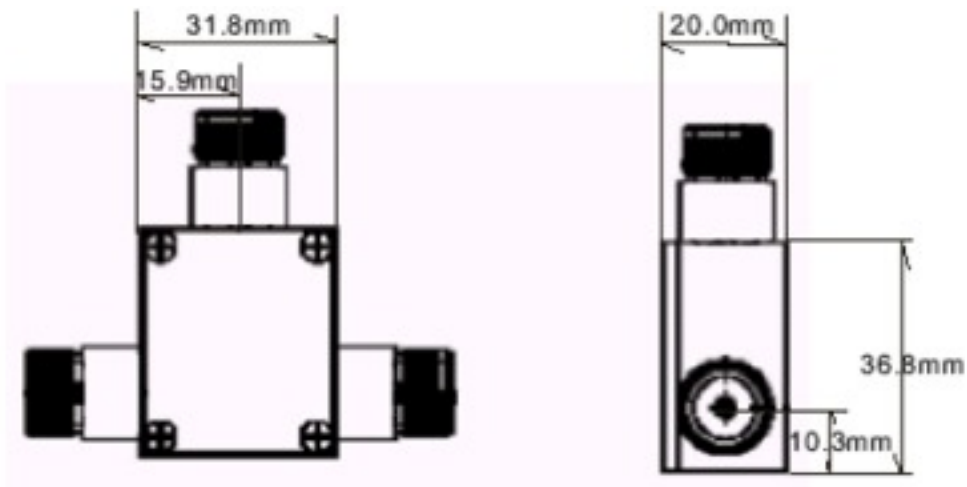

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)