



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Divider/Splitters


Model RMPD2.6000Nf

2-way Power Divider N female

Frequency (GHz)	Insertion Loss (dB)		Isolation (dB) Min	Return Loss (dB)				Phase Balance (°) Max	Amplitude Balance (dB) Max
	2-6 GHz Max	6-8 GHz Max		Input		Output			
				2-6 GHz Max	6-8 GHz Max	2-6 GHz Max	6-8 GHz Max		
2 - 6	1.0	1.2	20	1.45	1.50	1.40	1.45	5	0.4

Notes:

- Input and output impedance: 50 Ohms
- Connector: N female (3 places)
- Power: input: ≤ 25 W, output: ≤ 1 W
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved
- Operation temperature: -35C to +80C deg

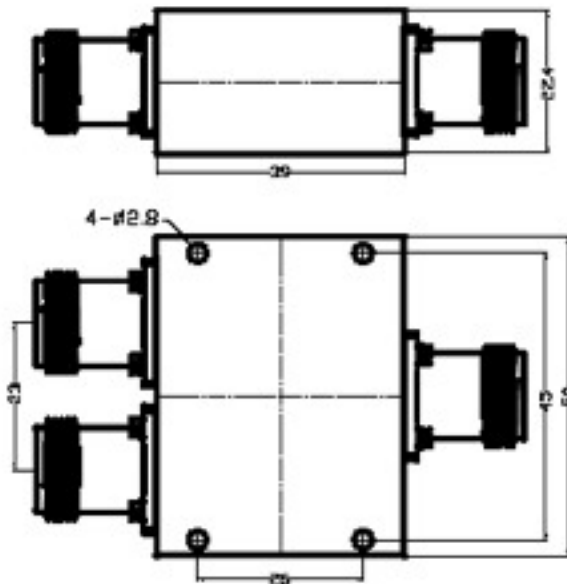

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com