94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Divider / Splitters

Model RMPD20.1400Sf — 20 way Power Divider SMA female

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB min)	VSWR (max)	Phase Balance (° max)	Amplitude Balance (dB max)
1250 - 1400	2.3	18	1.5:1	15	0.5

Notes:

a. Input and output impedance: 50 Ohms
b. Connector: SMA female (21 places)
c. Power:
   Input: ≤ 25 W
   Output: ≤ 1 W
   Peak: 50W
d. Case material: Aluminum alloy with Nickel-plating, Model #/Serial #/date code laser engraved. Serial # will be called out on PO. Date Code in Month and year of manufacture. Example Aug 2006 Date Code would be 0806
e. Operation temperature: -40C to +85C deg
f. Storage temperature: -55C to +105C deg

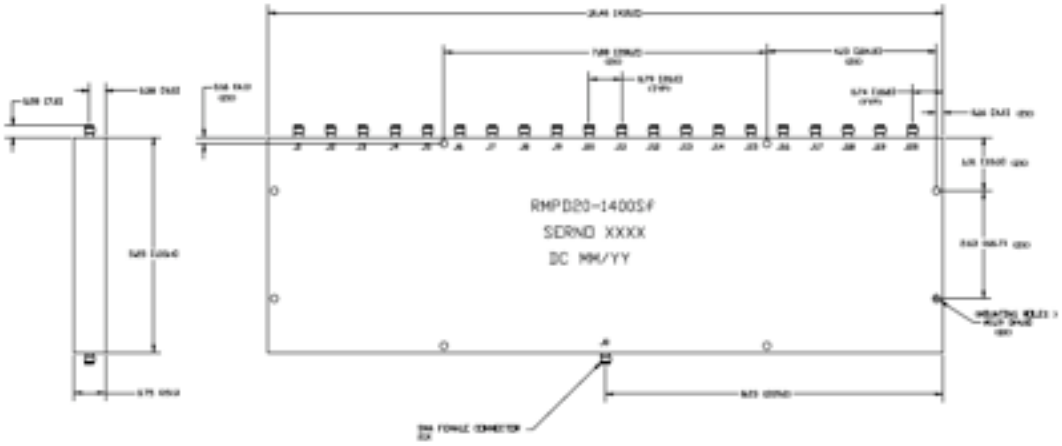

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com

Rev 04/18/12

94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com