



94 JACKSON RD, STE 100, DEVENS, MA 01434


Power Dividers

Model RMPD24.600-2400SMANffa
24 way Power Divider
N female, Out to SMA female Thread-in/no flange

Frequency (MHz)	Insertion Loss (dB)	Isolation (dB min)	VSWR (max)	Phase Balance (° max)	Amplitude Balance (dB max)
600 - 2400	0.8 typ/3.0 max	19	1.40:1	12	0.8

Notes:

- Input and output impedance: 50 Ohms
- Connector: In - N female, Out - SMA female (thread-in style – no flange)
- Forward Power: $\leq 25W$, Reverse: $\leq 1W$
- Case material: Aluminum alloy
- Operation temperature: -35C to +85C deg

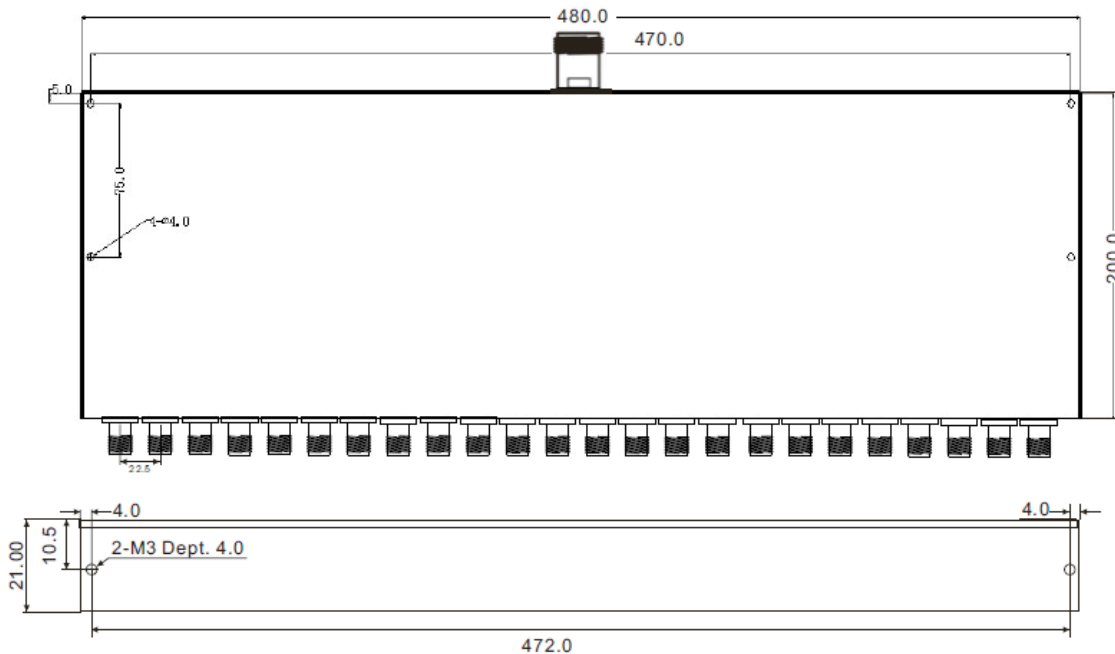

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com