



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Power Divider / Splitters


Model RMPD3.940Sf

3 way power divider, SMA female

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB min)	VSWR (max)	Phase Balance ( $^{\circ}$ max)	Amplitude Balance (dB max)	Power W
800 - 940	0.4	20	1.3:1	5	0.5	10

### Notes:

- Input and output impedance: 50 Ohms
- Internal Load Dissipation: 0.375 Watts
- Connector: SMA female jacks with lock nut (no washer)
- Case material: Aluminum alloy with Nickel-plating, laser engraved RM date code + (IN-1-2-3 as shown .12" high)
- Operation temperature: -35C to +80C deg

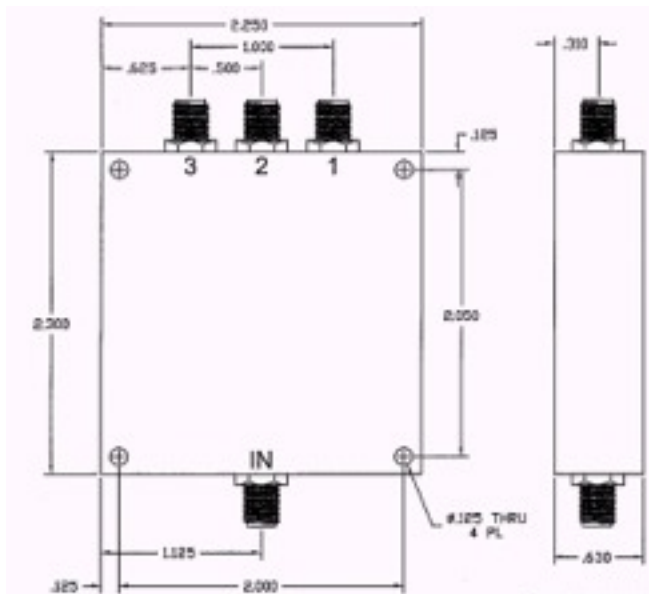

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)