94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider

Model RMPD4.05-12Sf 4-Way, 0º SMA female

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB min)	VSWR (max)	Phase Balance (º max)	Amplitude Balance (dB max)
500 - 12000	3.8	16	1.6:1	12	0.2

Notes:

a. Input and output impedance: 50 Ohms
b. Connector: SMA female 5 places
c. Power: Forward 30 W
d. Case material: Aluminum alloy with golden iridite plate
e. Operation temperature: -55C to +85C deg

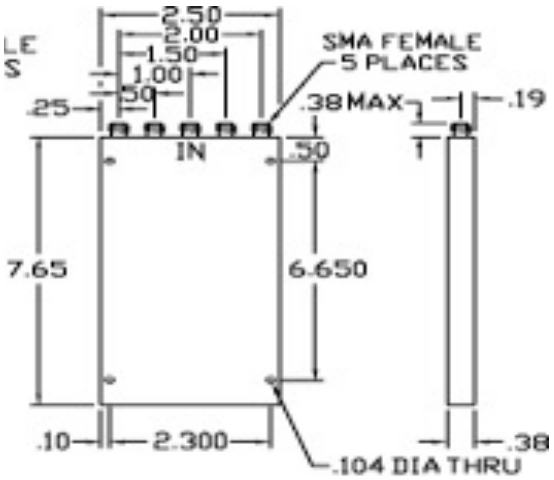

All specifications are subject to change without notice.

Telephone: 978-772-3767 Fax: 978-772-3768
www.responsemicrowave.com

Rev 04/17/12