



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Power Combiner/Divider


Model RMPD4.1000-3000Nf

4-Way, Type N

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB min)	VSWR (max)	Phase Balance ( $^{\circ}$ max)	Amplitude Balance (dB max)
1000 - 3000	1.0	20	1.5:1	5	0.6

**Notes:**

- a. Input and output impedance: 50 Ohms
- b. Connector: N female, 5 places
- c. Power: Forward 50 W CW Reverse: 1Wmax
- d. Material: case = aluminum alloy, substrate = alumina
- e. Operation temperature: -35C to +80C deg
- f. *RoHS Compliant*

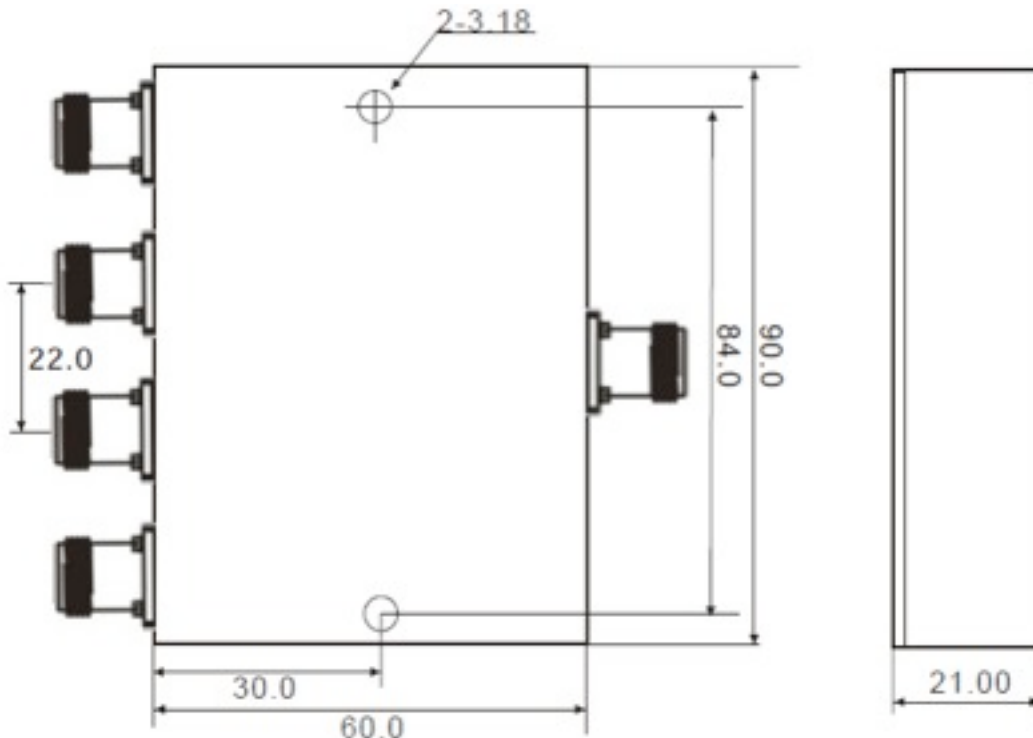

Dimensions in mm

*All specifications are subject to change without notice.*

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)