



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Divider/Splitters


Model RMPD4.2-6Sf

4-way Power Divider SMA female

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB min)	VSWR (max)	Phase Balance ($^{\circ}$ max)	Amplitude Balance (dB max)
2000 - 6000	0.8	20	1.4:1	4	0.4

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female (5 places)
- Power: input: ≤ 1 W
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
- Operation temperature: -35°C to $+80^{\circ}\text{C}$ deg

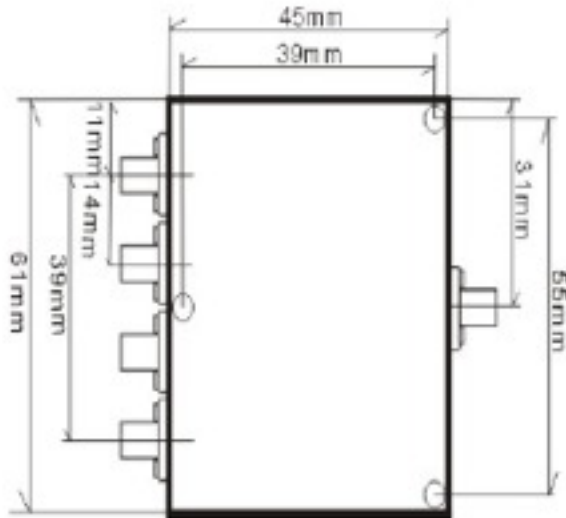

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com