



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Power Divider/Splitters


Model RMPD4.2500Sf20w

4-way Power Divider SMA female

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB typ)	VSWR (max)	Phase Balance ($^{\circ}$ max)	Amplitude Balance (dB max)
800 - 2500	0.5	23	1.4:1	6	0.6

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female (5 places)
- Power: input: ≤ 20 W
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
- Operation temperature: -35°C to $+80^{\circ}\text{C}$ deg
- RoHS Compliant**

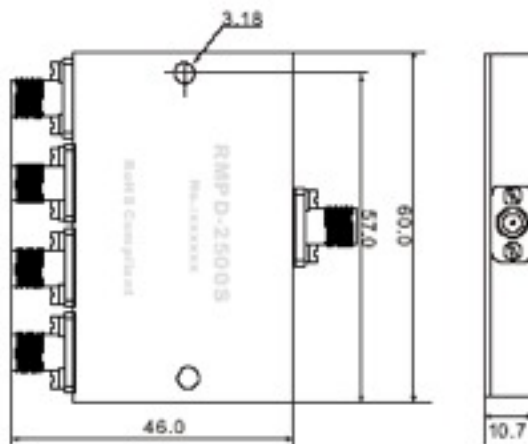

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com