



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Divider / Splitters


Model RMPD4.9000Sf

4 way Power Divider SMA female

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB min)	VSWR (max)	Phase Balance ($^{\circ}$ max)	Amplitude Balance (dB max)
7000 - 9000	0.5	20	1.35:1	6	0.4

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female
- Power: 25w forward, ≤ 1 W reverse
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
- Operation temperature: -35C to +85C deg

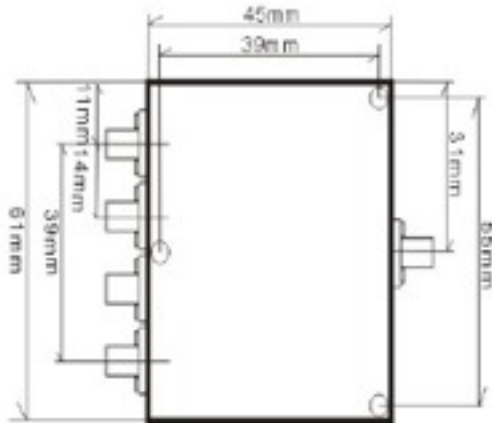

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com