



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD6.2500Sf

6-Way, SMA female

Frequency (MHz)	Insertion Loss (dB) typ/max	Isolation (dB) typ/min	VSWR (typ/max)	Phase Balance (° max)	Amplitude Balance (dB max)
800 - 2500	0.7/1.2	22/20	1.25:1/1.50:1	8	0.7

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female jacks
- Power: Forward ≤ 15 W; Reverse: < 1 W
- Case material: Aluminum alloy with nickel plating, logo/date code laser engraved.
- Operation temperature: -35°C to $+80^{\circ}\text{C}$ deg

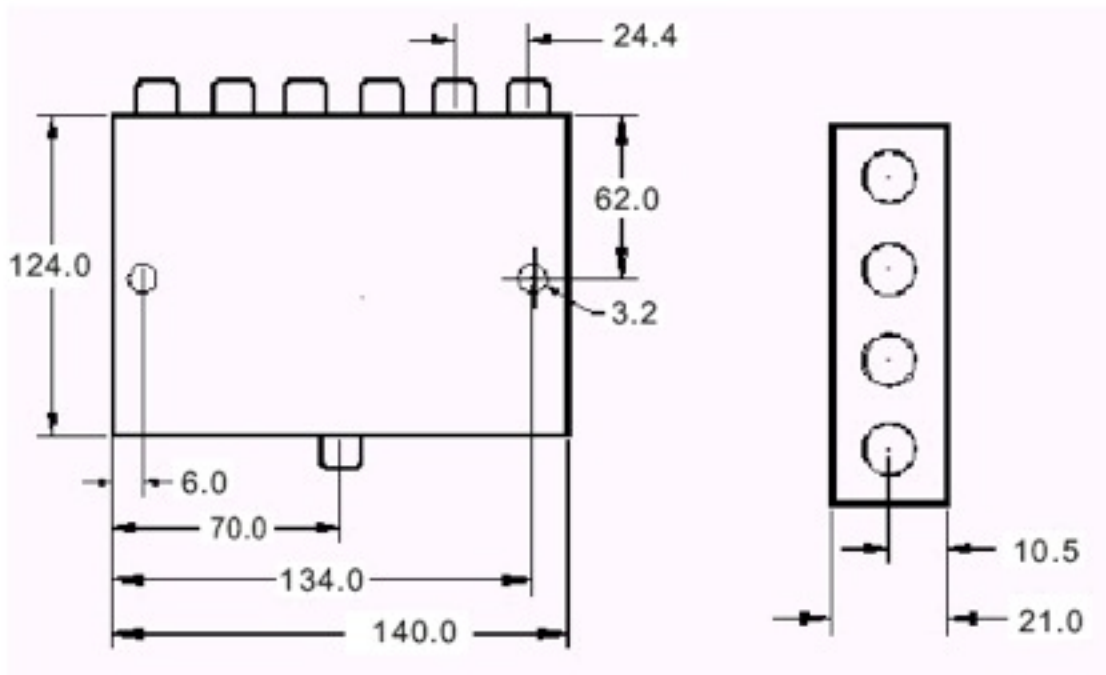

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com