



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD6.400-500.Nf

6-Way, 0° N female

Frequency (MHz)	Insertion Loss (dB) typ/max	Isolation (dB) typ/min	VSWR (typ/max)	Phase Balance (° max)	Amplitude Balance (dB max)
400 - 500	0.4/0.7	23/20	1.20:1/1.50:1	5	0.6

Notes:

- Input and output impedance: 50 Ohms
- Connector: N female 7 places
- Power: Forward 35 W Reverse: 1W
- Case material: Aluminum alloy with iridite finish
- Operation temperature: -55C to +85C deg

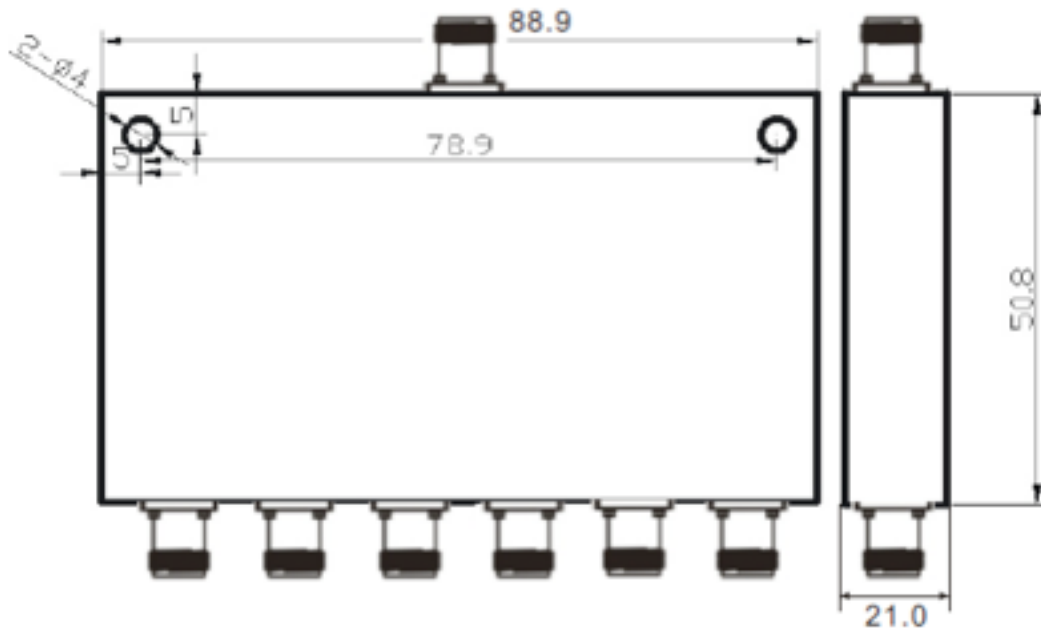

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com