



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Combiner/Divider


Model RMPD6.950-2150Sf

6-Way, 0° SMA female

Frequency (MHz)	Insertion Loss (dB max)	Isolation (dB min)	VSWR (typ)	Phase Balance (° max)	Amplitude Balance (dB max)
950 - 2150	0.8	20	1.25:1	10	1.0

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 7 places
- Power: Forward 50 W Reverse: 1W
- Case material: Aluminum alloy with iridite finish
- Operation temperature: -55C to +85C deg

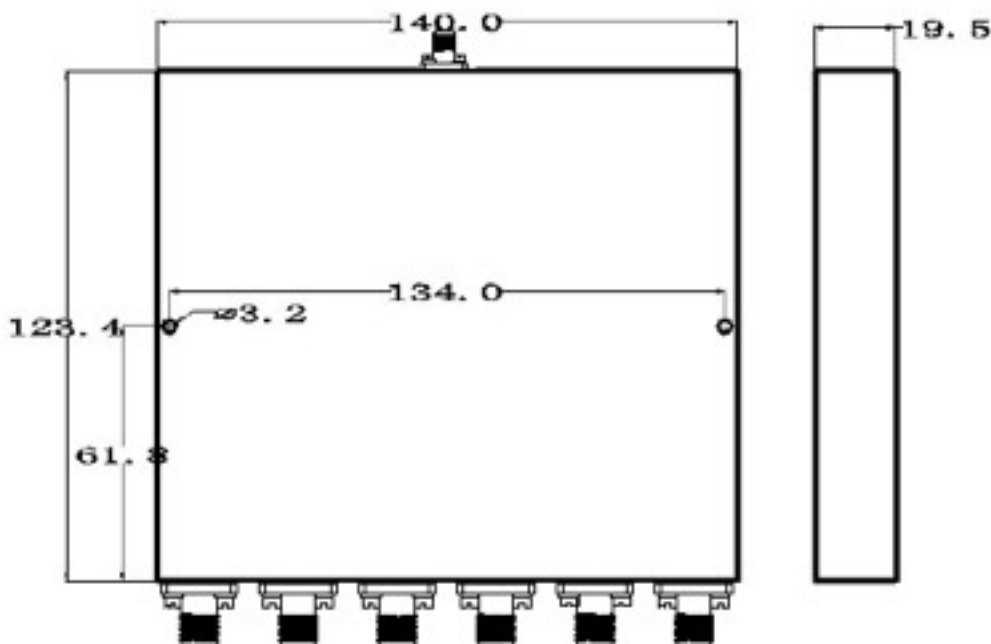

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com