



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Power Divider/Combiner


Model RMPD8.2500Sf

8 way power divider SMA female

Frequency (MHz)	Insertion Loss (dB) typ/max	Isolation (dB) typ/min	VSWR (typ/max)	Phase Balance ( $^{\circ}$ max)	Amplitude Balance (dB max)
800 - 2500	0.8/1.8	25/20	1.2:1/1.5:1	15	1.6

### Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female (options: N, BNC, TNC & Reverse Polarity versions)
- Power:  $\leq 1$  W
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
- Operation temperature:  $-35^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$  deg

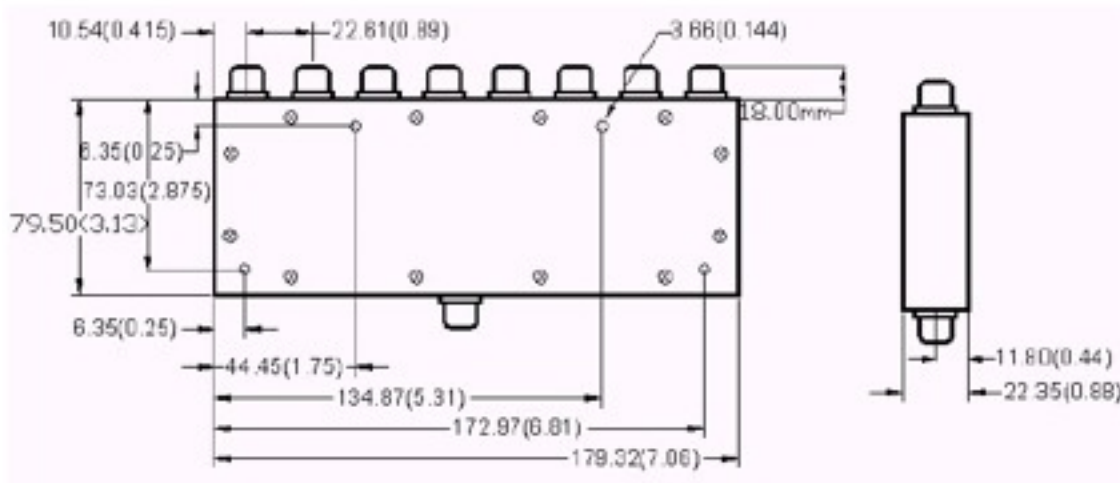

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)