



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Power Combiner/Divider

Model RMPD8.500-1000Sf


8-Way, SMA female

Frequency (MHz)	Insertion Loss (dB typ)	Isolation (dB min)	VSWR (max)	Phase Balance (° max)	Amplitude Balance (dB max)
500 - 1000	0.7	20	1.5:1	15	1.6

### Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 9 places
- Power: 50 W forward, 1W reverse
- Case material: Aluminum alloy w/iridite finish
- Operation temperature: -35C to +85C deg

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

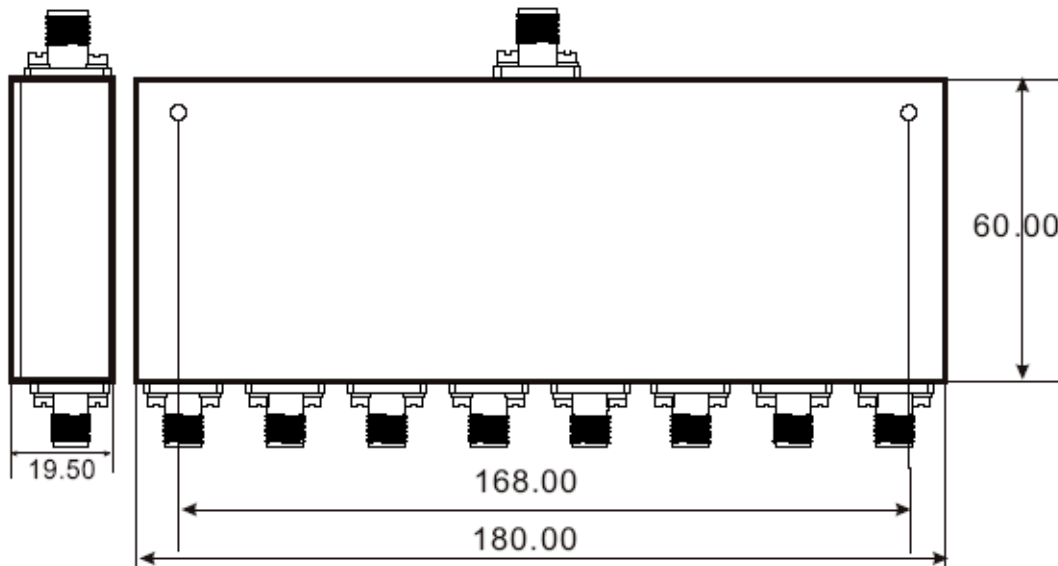

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

*All specifications are subject to change without notice.*

**Telephone: 978-772-3767**

**Fax: 978-772-3768**

**[www.responsemicrowave.com](http://www.responsemicrowave.com)**