



94 JACKSON ROAD, SUITE 110, DEVENS , M A 0 1 4 3 4

Coaxial Rotary Joints


Model RMRJ.12500Nff

In-line Type N female

Frequency (MHz)	Insertion Loss (dB max)	VSWR (max)	Rotational Effect (WOW)	Rotational Speed (continuous)	Starting Torque (max)
DC-12500	0.4	1.4:1	1.01/360°	500rpm	8oz-in

Notes:

- a. Input and output impedance: 50 Ohms
- b. Connector: Type N female (SMA available)
- c. Power: 100 W @ 1GHz
- d. Case material: Brass/Nickel-plating
- e. Operation temperature: -35C to +80C deg
- f. Life tested to over 1 million revolutions

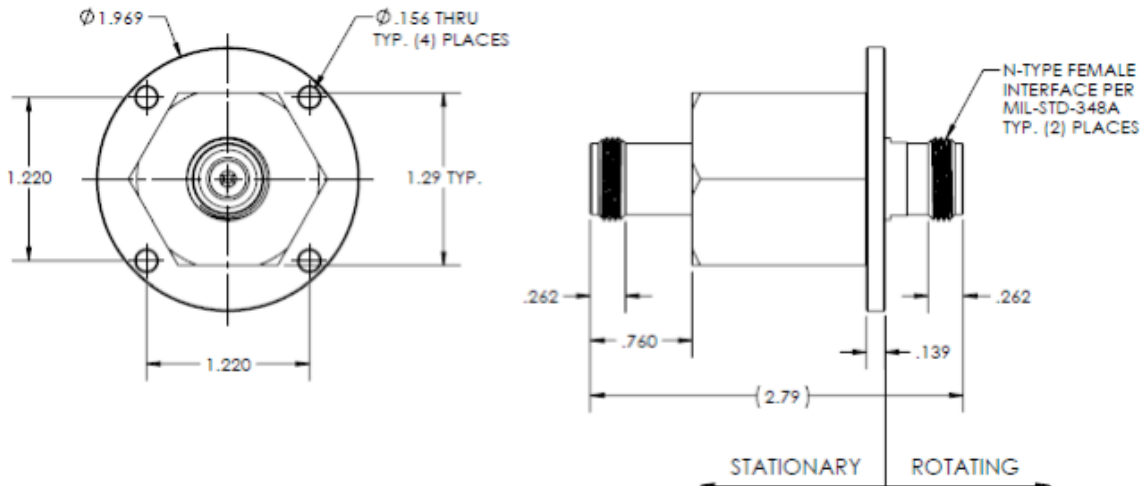

Dimensions in inches. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com